Jiangsu Easy Snow International Trading Co., Ltd

Company's Profile




Company Profile


Jiangsu **Easy Snow** International Trading Co., Ltd. is the Global leading **COLD STORAGE** and refrigeration equipment trader, committed to providing worldwide clients with the best quality cold room solutions. “**Qingbai**” belongs to the company's refrigeration brand, “**Qingbai**”in ancient Chinese words is the meaning of “**SNOW**”, on behalf of the company's original intention as simple as snow, pure. Our company has rich project experience in refrigeration industry, and have studied and cooperated with international famous engineering school- Hohai University in engineering projects. Main products: **cold storage , refrigeration equipment, solar cold storage, evaporation equipment, condensing unit, cold room doors, PU panels**, etc. No matter now or in the future, we will always follow the principle of **"Efficiency is life, Quality is fundamental"**, emphasize the concept of talent and science and technology, and take the road of innovative development with greater challenges.

COLD STORAGE





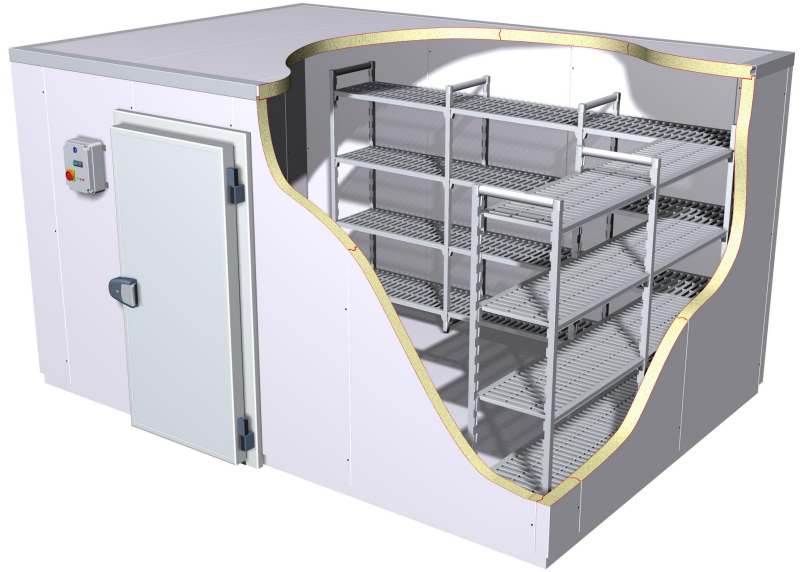

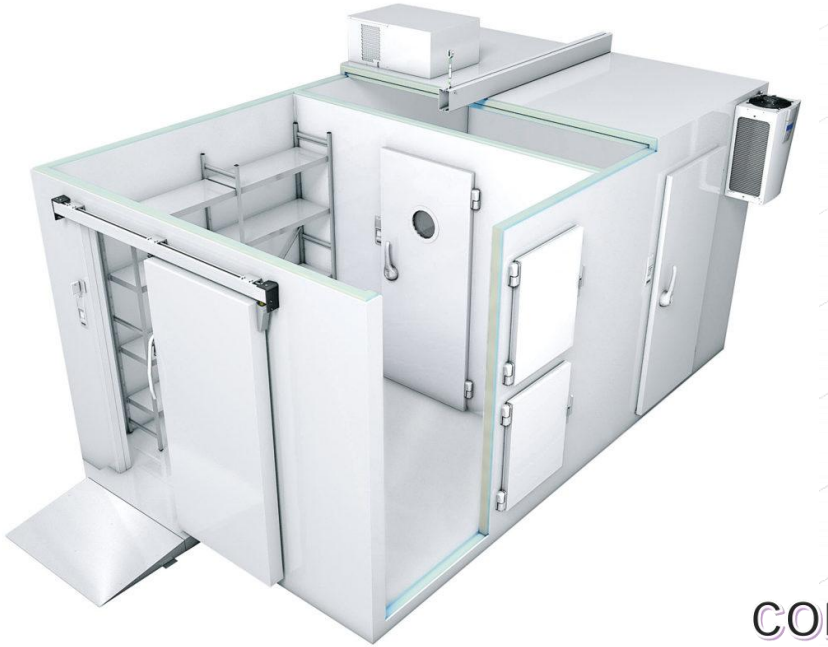





COLD STORAGE/COLD ROOM/FREEZER/CHILLER/BLASTING ROOM

EVAPORATOR





Ordinary style



Two side air style



with Air duct style

PU/PUR PANEL-CAMLOCK









Polyurethane cold storage panel						
Thickness	Upper layer：0.4~0.8mm					
	50mm	75mm	100mm	120mm	150mm	200mm
	Bottom layer：0.4-0.8mm					
Surface material	PPGI,GI,Stainless Steel,Embossed Aluminium					
Temperature range	≥0°		-18°≤x≤0°		≤-18°	
Color	Common white gray ,other RAL color is avaiable					
Density	40±2kg/m3		Fir resistance grage		B2	
Thermal conductivity	≤0.024W/(m.K)		Compressive strength		≥160kpa	

PU/PUR PANEL-PLUG IN



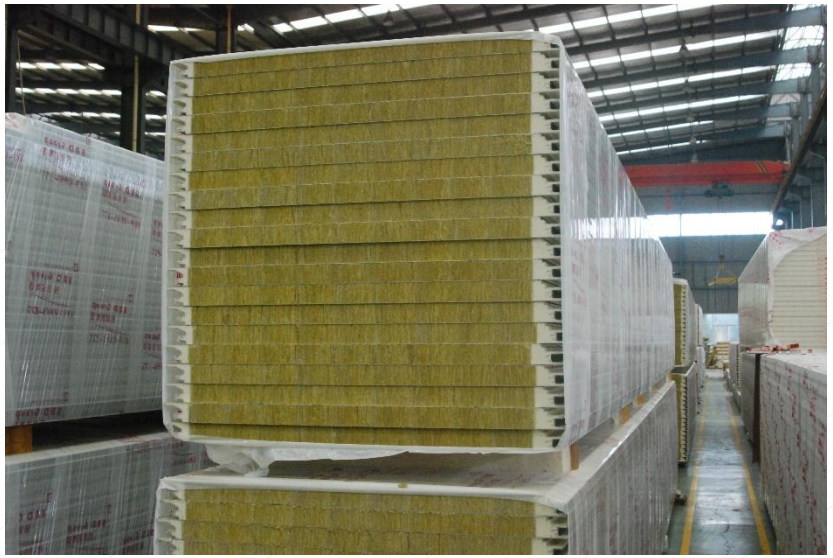

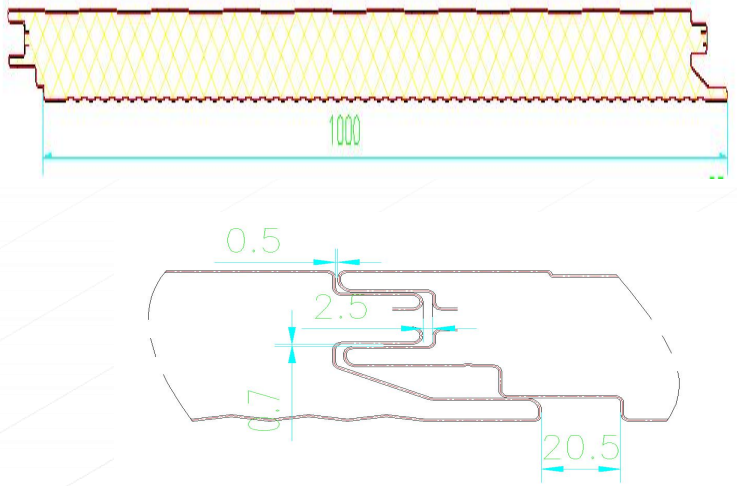


Polyurethane cold storage panel（MOQ ≥500m2）

Thickness	Upper layer：0.4-0.6mm		
	50-100mm（50mm、75mm、80mm、100mm）		
	Bottom layer：0.4-0.6mm		
Surface material	PPGI,GI,Stainless Steel,Embossed Aluminium		
Color	Common white gray ,other RAL color is avaiable		
Density	100kgs/cbm；or 120kgs/m3	Fir resistance grage	A
Thermal conductivity	≤0.045W/(m.K)	Compressive strength	≥160kpa

PU/PUR PANEL-PLUG IN





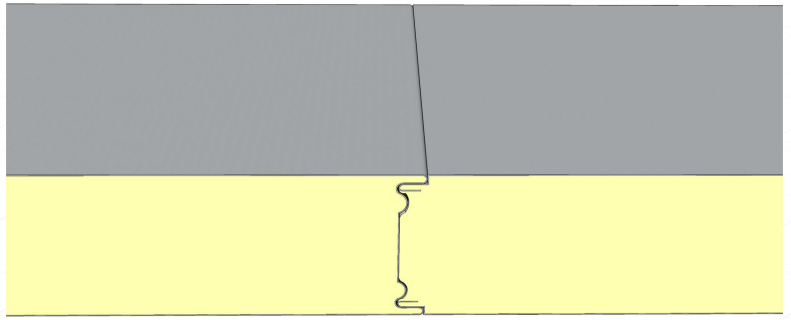

Polyurethane cold storage panel（MOQ ≥500m2）			
Thickness	Upper layer：0.4-0.8mm		
	50-250mm		
	Bottom layer：0.4-0.8mm		
Surface material	PPGI,GI,Stainless Steel,Embossed Aluminium		
Temperature range	-35°≤x≤16°		
Color	Common white gray ,other RAL color is avaiable		
Density	PIR:45±2kg/m3 ； PU:40±2kg/m3	Fir resistance grage	PIR:B1； PU:B2
Thermal conductivity	≤0.024W/(m.K)	Compressive strength	≥160kpa

COLD ROOM DOOR-hinged








COLD ROOM DOOR-Hinged door			
Thickness	100MM/150MM		
Surface material	PPGI,Stainless Steel		
Application	CHILLER ROOM/FREEZER ROOM/BLASTING ROOM		
Color	Common white gray ,other RAL color is avaiable		
Density	40±2kg/m3	Open method	Single/Double open
kinds of hinded door	Half buried door、Full buried door		

COLD ROOM DOOR-sliding door




Cold storage sliding door

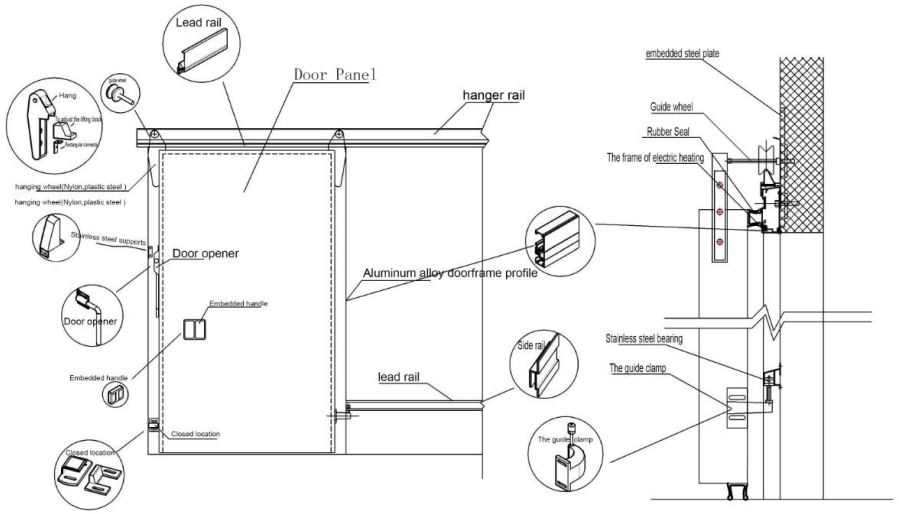

COLD ROOM DOOR-Sliding door			
Thickness	100MM/150MM		
Surface material	PPGI,Stainless Steel		
Application	CHILLER ROOM/FREEZER ROOM/BLASTING ROOM		
Color	Common white gray ,other RAL color is avaiable		
Density	40±2kg/m3	Open method	Single/Double open

MONOBLOCK

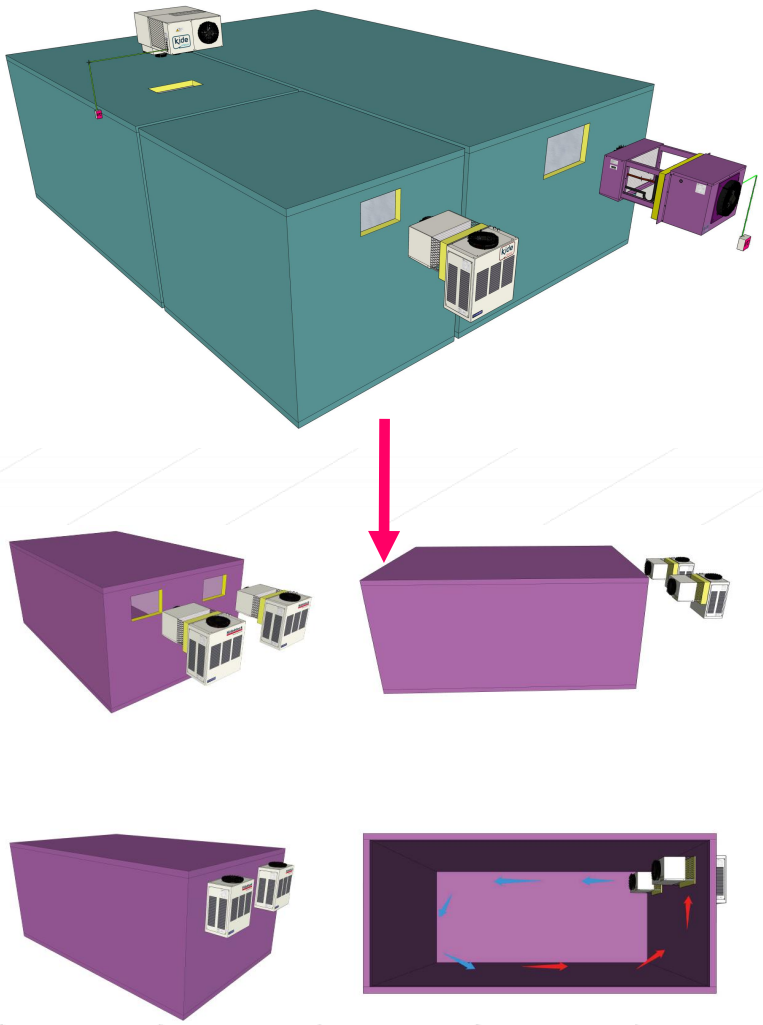





	Series 系列	Modelo Model 型号	Potencia frigorífica Refrigeration capacity 制冷量	ºC EXT	ºC EXT		Compresor Compressor 压缩机		R-404A Kg 制冷剂充注量	Intensidad nominal Nominal consumption 额定电流	Intensidad absorc. max. Max. load current 最大电流	Caudal Flow 风量 condens. evapora. 冷凝-蒸发	Kg 重量
			W	m³	m³	电压	马力/HP	kW		A	A	m³/h	
0 ºC ~10 ºC	0 ºC 100	EMB1006M1Z	1205	9	7	220/1/50	1/2	0.4	<1	5.1	6.1	1100-880	65
		EMB1007M1Z	1395	12	9	220/1/50	3/4	0.5	<1	5.7	6.8	1100-880	65
	200	EMB2010M1Z	2011	20	17	220/1/50	1 1/4	0.9	<1.5	7.2	8.7	1920-1760	95
		EMB2015M5Z	2309	29	21	380/3/50	1 1/2	1.1	<1.5	4.1	4.8	1920-1760	95
	300	EMB3017M5Z	3162	37	30	380/3/50	1 3/4	1.3	<2	4.1	4.9	1920-1920	100
		EMB3020M5Z	4107	45	37	380/3/50	2	1.5	<2	5.1	6.2	1920-1920	100
-25 ºC ~ -15 ºC	-20 ºC 100	EMB1010L1Z	940	6	4	220/1/50	1	0.7	<1	5.2	6.3	1100-880	70
		EMB1015L1Z	1200	9	6	220/1/50	1 1/2	1.1	<1	5.5	7.5	1100-880	70
	200	EMB2015L1Z	1280	11	8	220/1/50	1 1/2	1.1	<1.5	6.8	8.3	1920-1760	100
		EMB2017L5Z	1434	15	10	380/3/50	1 3/4	1.3	<1.5	3.8	4.5	1920-1760	100
	300	EMB3017L5Z	1621	22	15	380/3/50	2	1.5	<2	3.4	4.1	1920-1920	105
		EMB3020L5Z	2513	27	19	380/3/50	2 1/2	1.8	<2	5.0	6.0	1920-1920	105

Compressor-Piston type





PARALLEL COMPRESSORS



SEMI-HERMETIC
COMPRESSORS




2-STAGE SEMI-HERMETIC
COMPRESSORS

BITZER BRAND

Compressor-scroll compressor



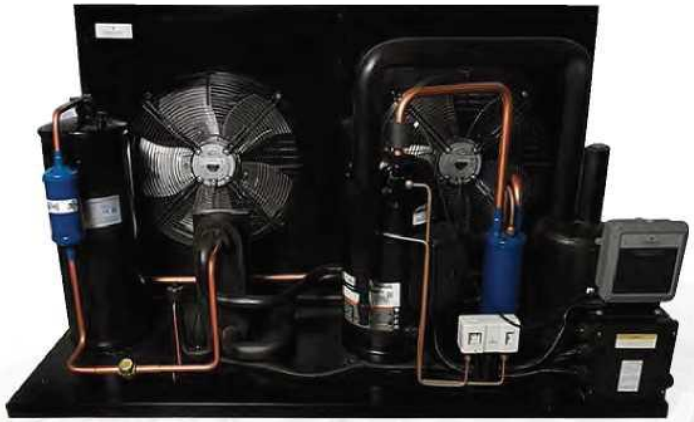

Emerson Copeland
BRAND

ZX Condensing Unit

Indoor Scroll Condensing Units for Refrigeration







Fractional HP Condensing Units

Compressor-Screw machine



Bitzer screw unit (75HPX2) - siphon oil cooling




Fusheng screw machine (50HPX2)- air cooling



Refcomp screw unit (80hpx2)- water cooling

Solar Cold storage

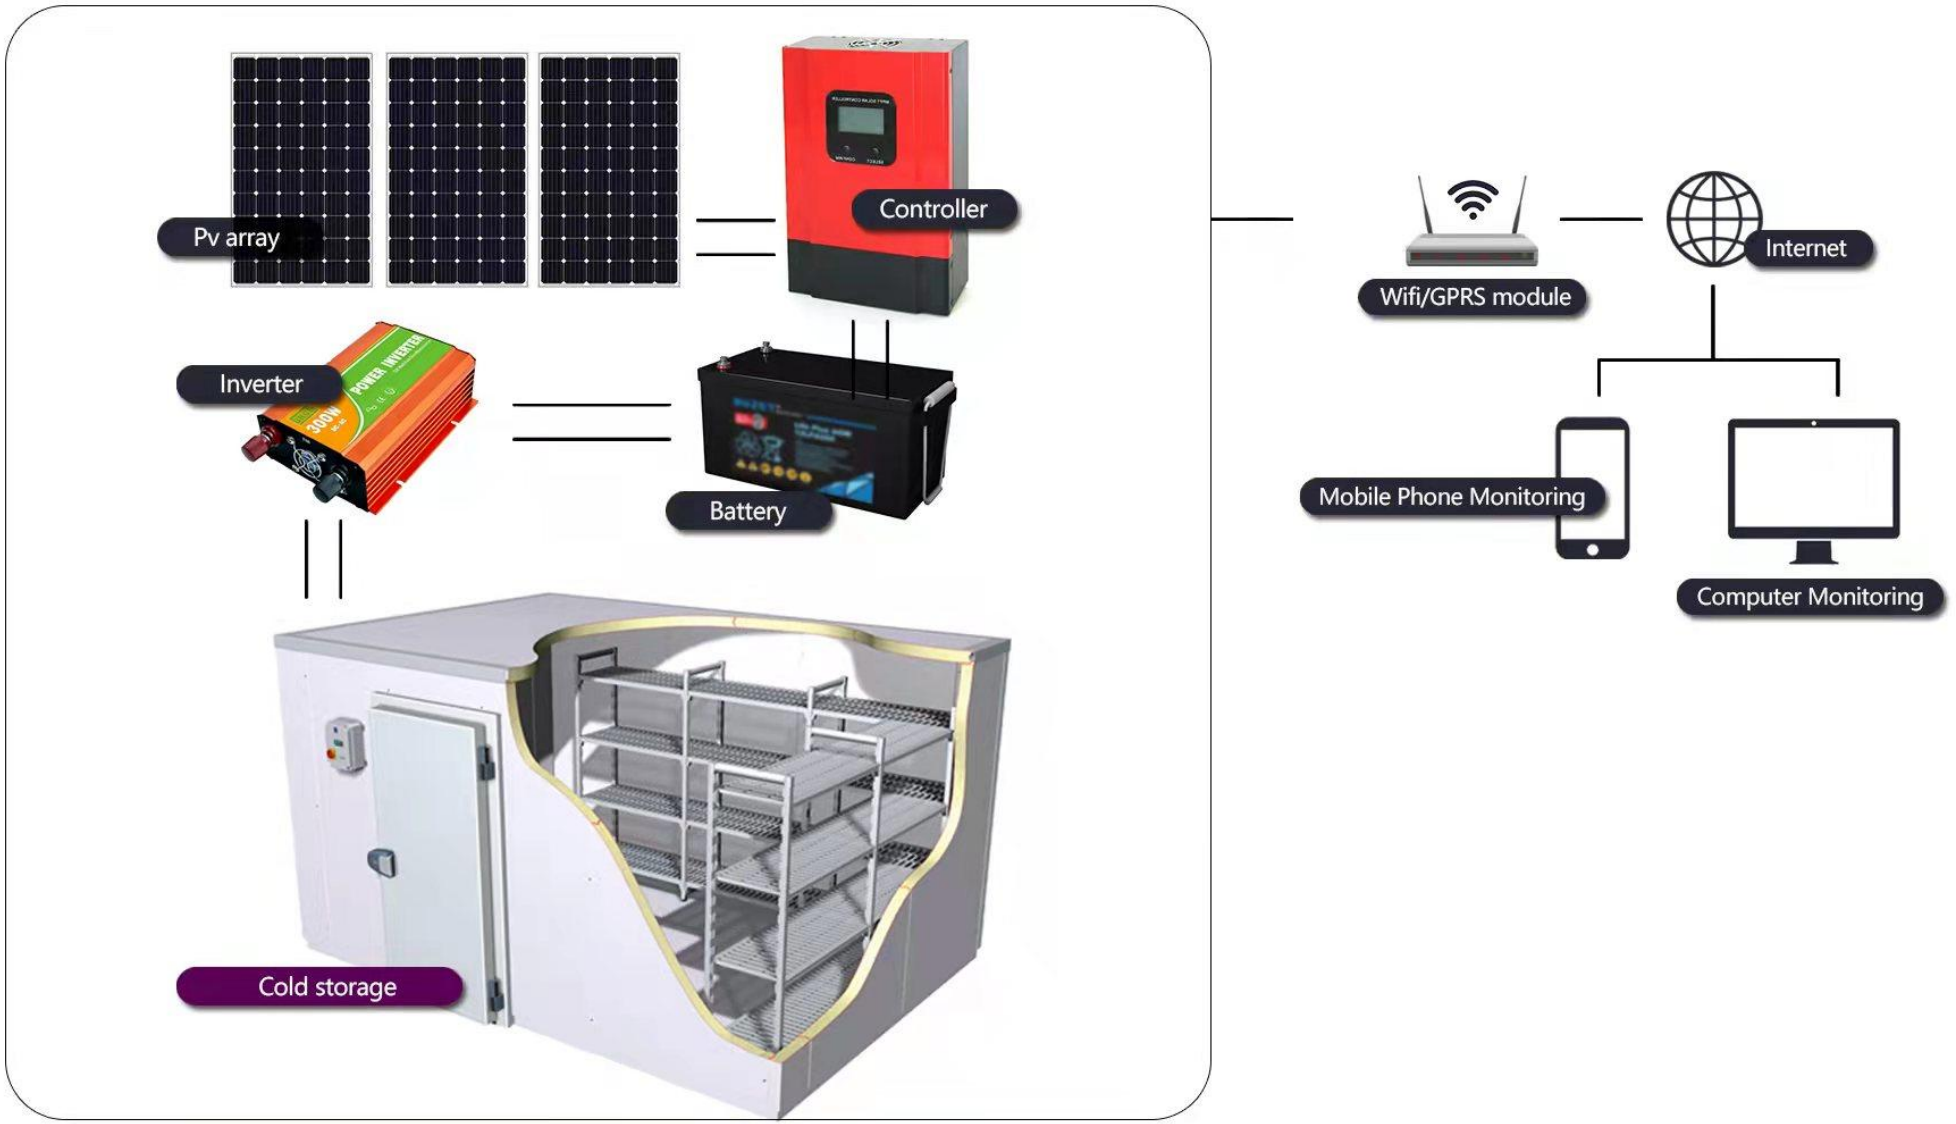

One-stop hazardous chemicals logistics supply chain solution






Walk in Cooler with Glass Doors






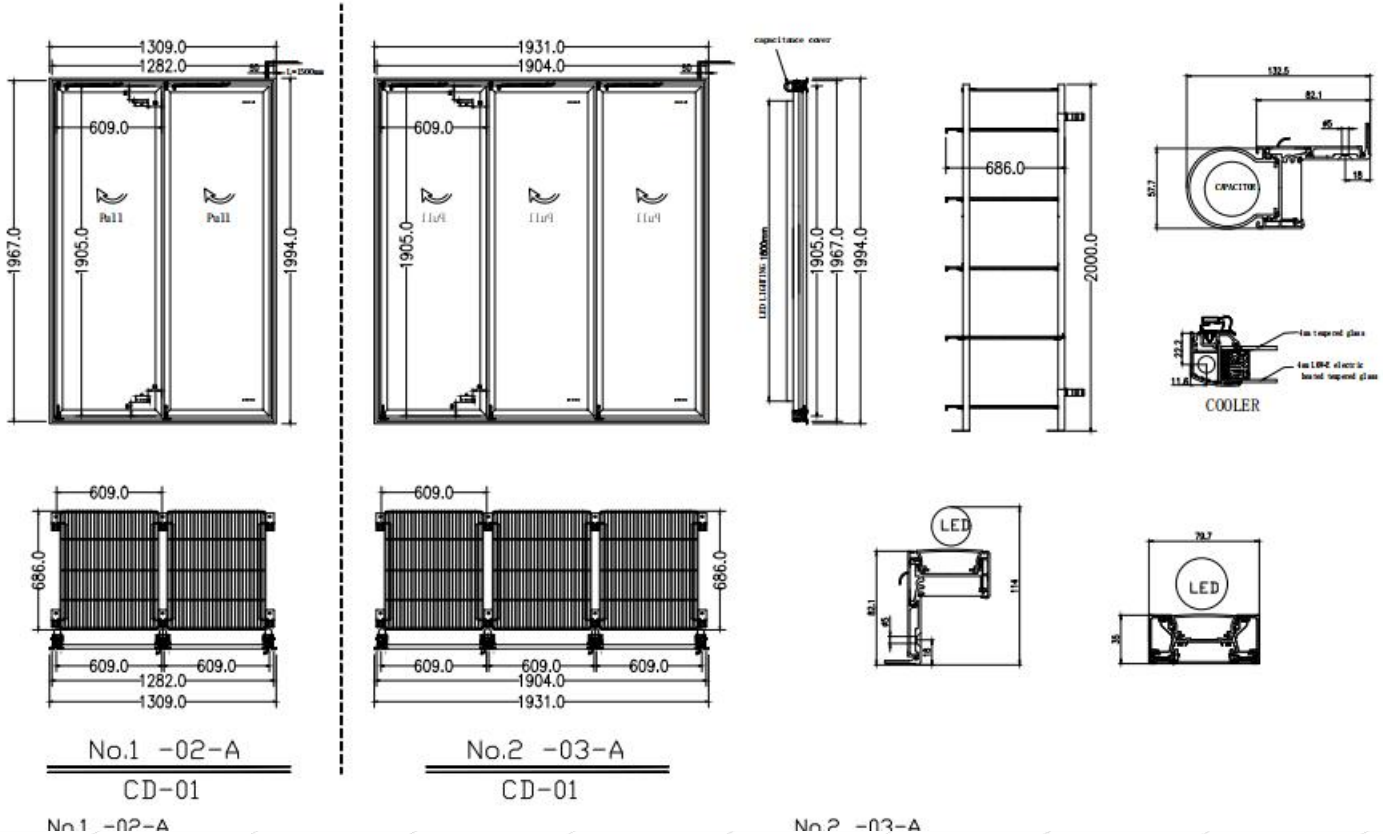

Cold room accessories



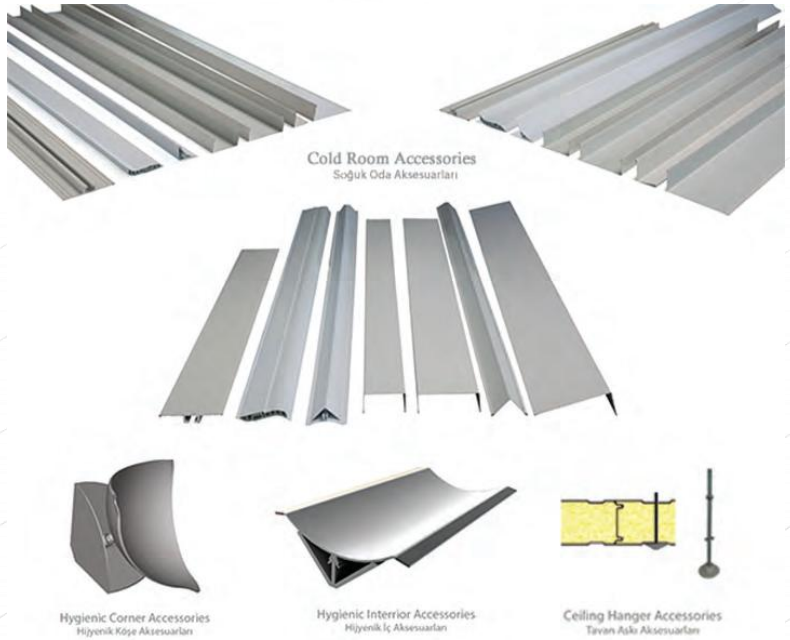








Aluminium profile





4# Angle aluminum

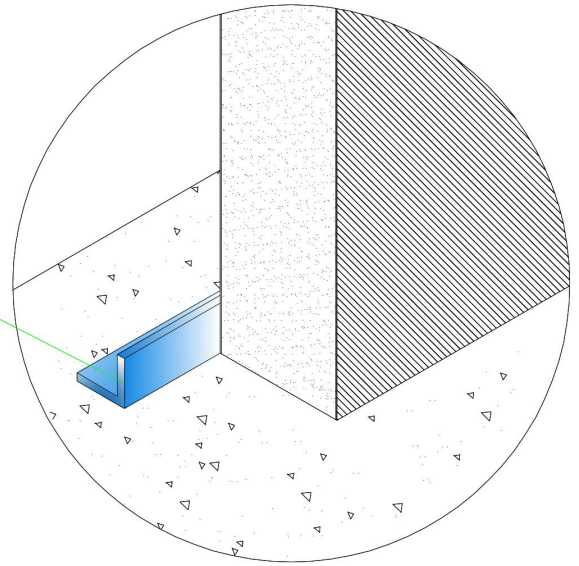


Aluminium profile	
Thickness	1.2mm
Size	40*40mm/50*50mm
Length	6m/pcs
Use	Fixed insulation material

Blasting freezer




Flat plate freezer

Single spiral/double spiral freezer

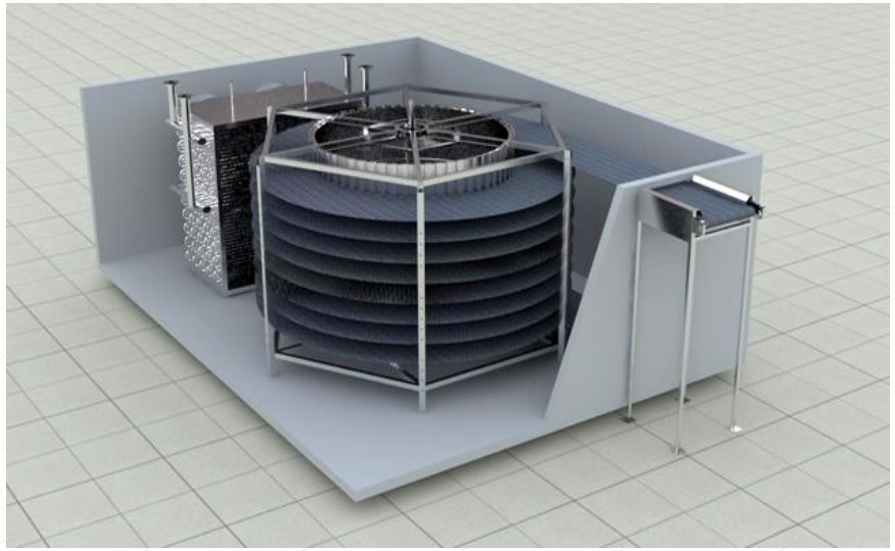



Net belt freezer

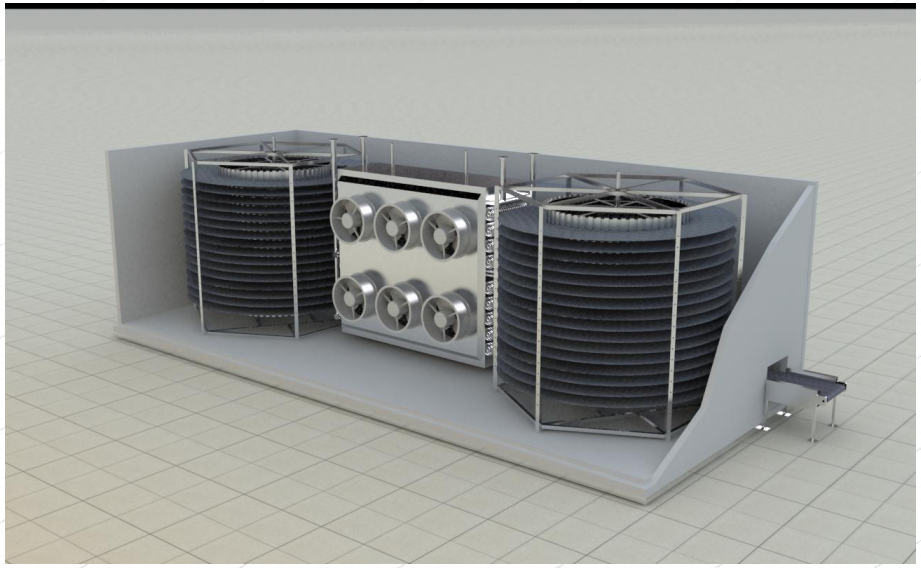


Project picture



Project picture





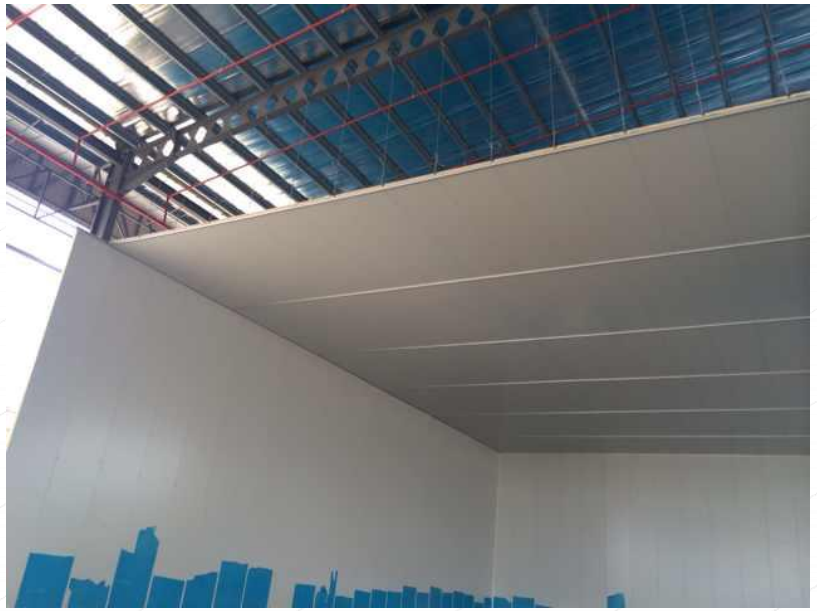

Project picture






Industrial Overhead door



PANEL MODELS

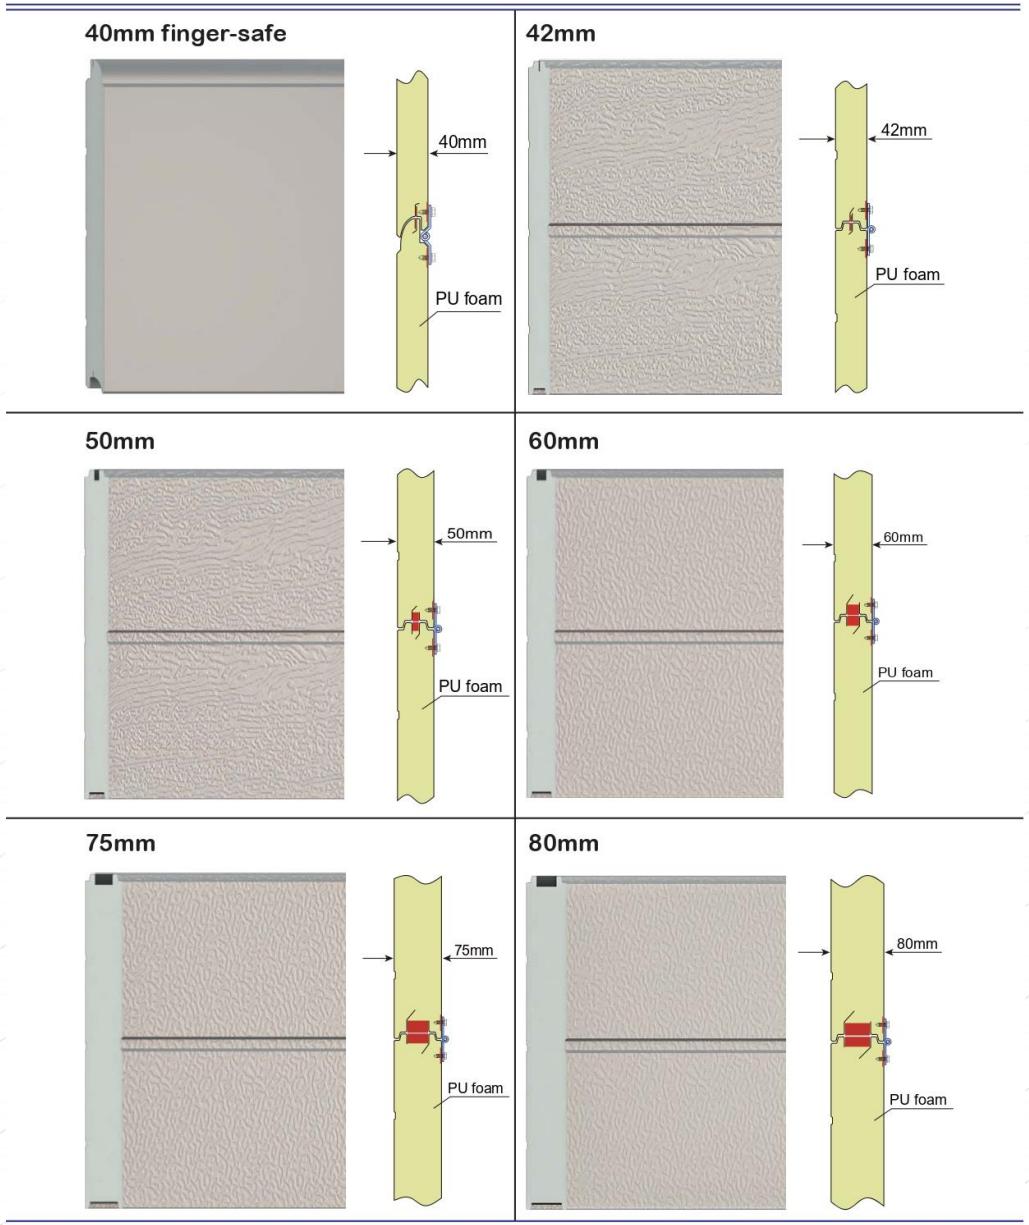

Industrial Overhead door

Lifting Ways of Industrial Door

Standard lifting





Vertical lifting without middle beam






Lifting Ways of Industrial Door

Vertical lifting with middle beam





Door Hole Diagram

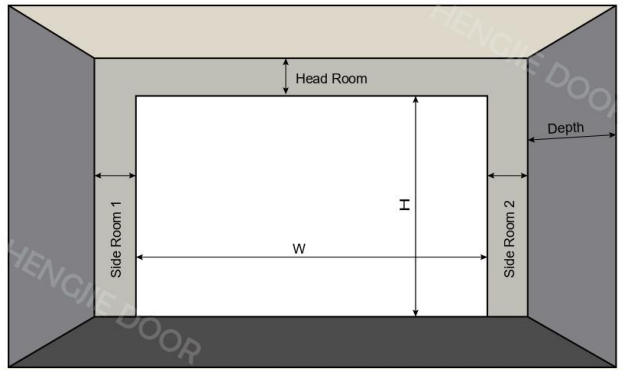

To be quoted properly
These sizes should be
informed accurately!

Industrial door project






Industrial door -High Speed Door-1




Wind bar type High Speed Door

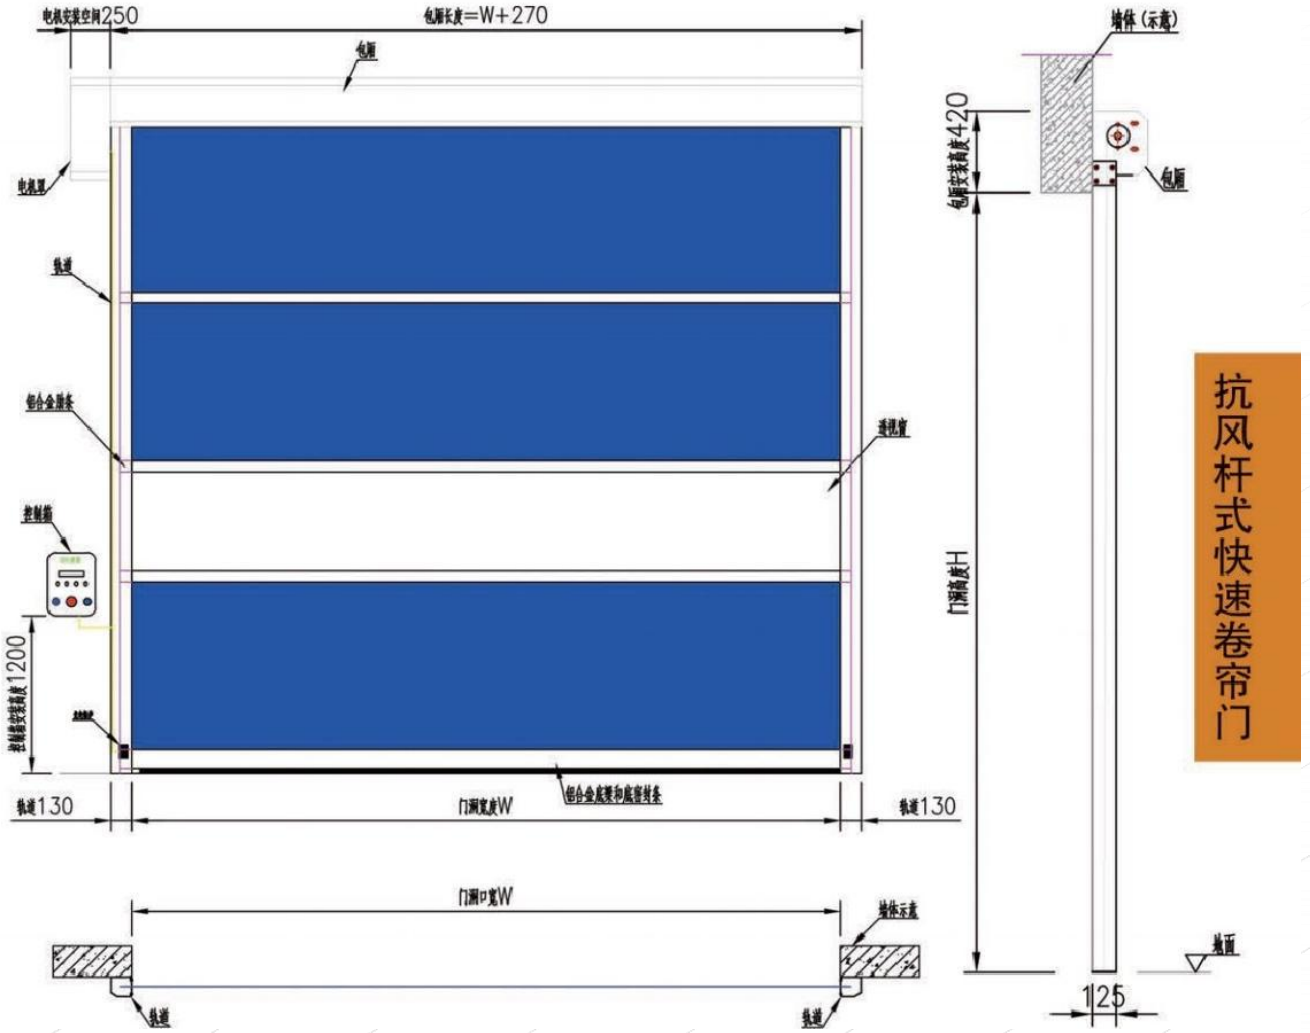

Industrial door -High Speed Door-2



Cold storage low temperature High Speed Door

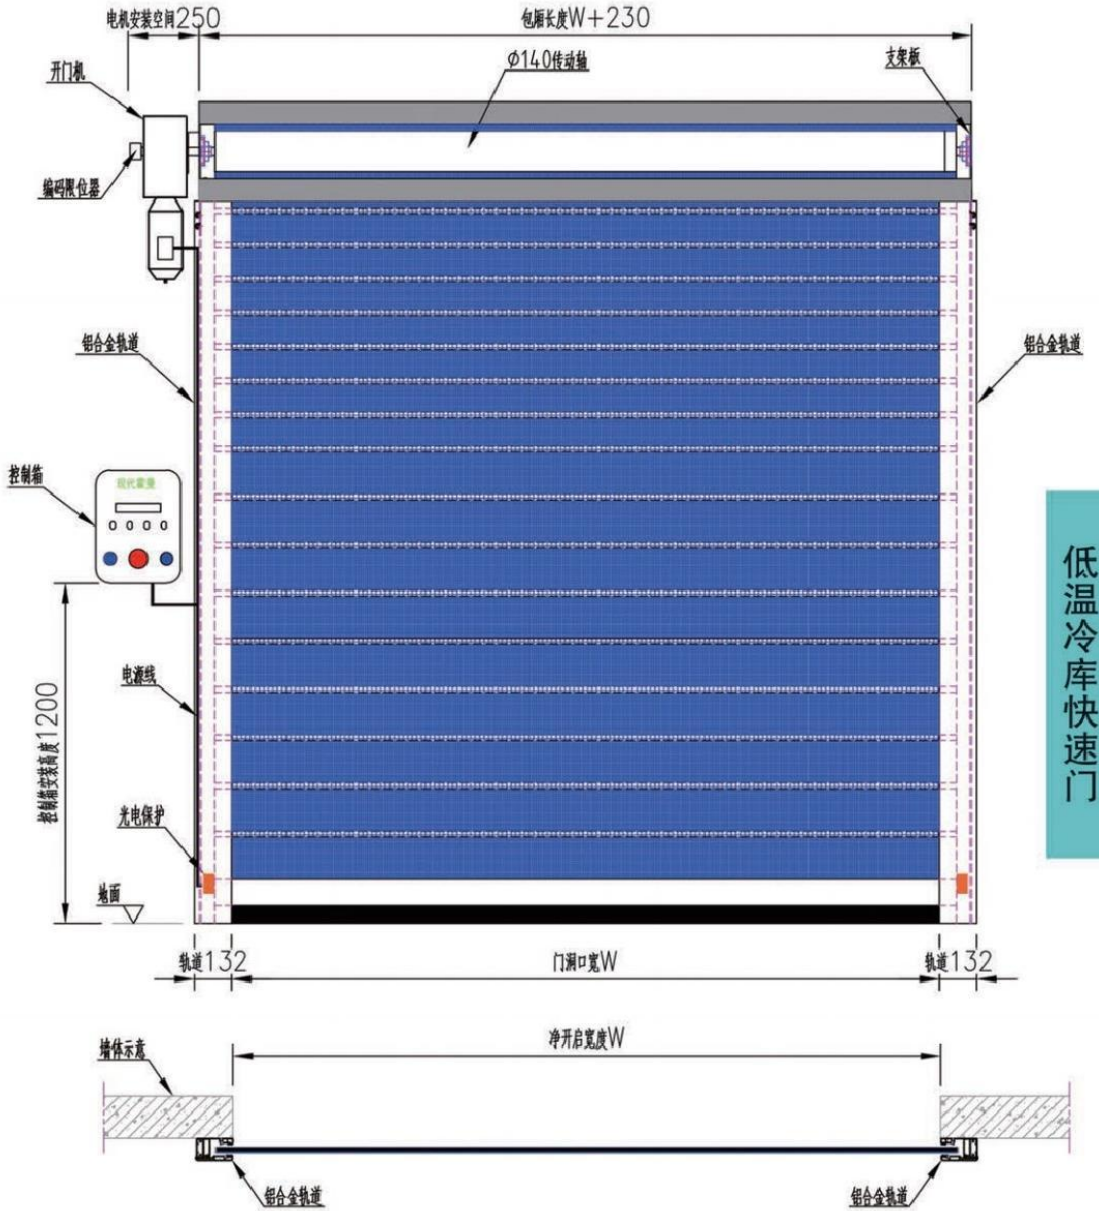


低温冷库快速门

Industrial door -High Speed Door-3



Normal cold storage High Speed Door

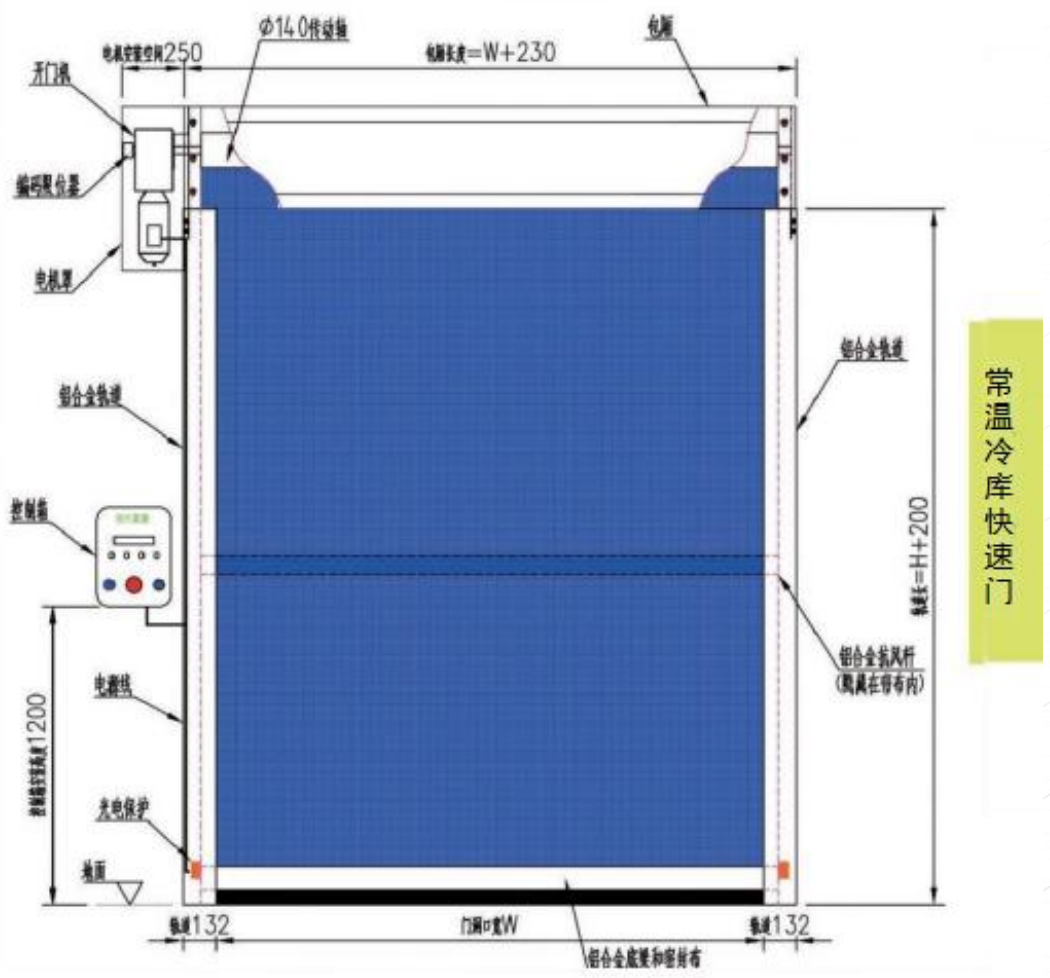

常温冷库快速门

Industrial door -doorseal



可折叠式机械门封

Collapsible mechanical door seal



Sponge type door seal

海绵式门封

充气式门封

Inflatable type door seals



门封



Sponge mechanical type door seal

海绵式机械门封

Industrial door-Unloading platform



翻转式唇板液压式装卸货平台

Rollover unloading platform



伸缩式唇板液压式装卸货平台

Retractable unloading platform

Jiangsu Easy Snow International Trading Co., Ltd.



https://www.qbcoldroom.com/

Eamil: iceycoolroom@foxmail.com

Add：Jingwei Building, Wujin District, Changzhou City, Jiangsu Province;

Tell/WhatsApp/Wechat：

Alice： +8615151955156

lily： +8613569906043